

Wiring description


Pin	4-pin socket						
1	U frequency converter phase						
2	V frequency converter phase						
3	W frequency converter phase						
4	Wiring ground						


Special warning:

- The electric main shaft shall be installed at the clamped position; otherwise the bearing will be easily damaged!
- The compressed air shall be dry and clean, and the filtering accuracy shall be 0.1 micron!
 Atmospheric pressure is 0.1- 0.2MPa, and the air seal shall be normally open. It is recommended to
 use the two-level filtration, with the filtration accuracy of 0.5 micron/0.1 micron respectively, and the
 air filter shall have automatic discharge device.

												Two-pole 380V
Marks	Number of places	Zoning	Modified document number	Signature	Date							Outline
Designed by	1		Standardized by				Phase mark			Weight	Scale	diagram
Reviewe	d								L,			 GDK125-18-24Z/5.5
Processe	d		Approved by			Total page(s)			Page		GDI(125 10 - 2427 5.5	

GDK125-18-24Z/5.5 380V 11.0A 2P

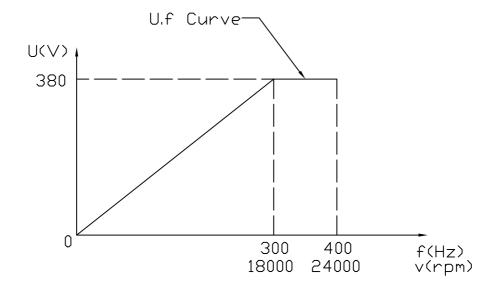

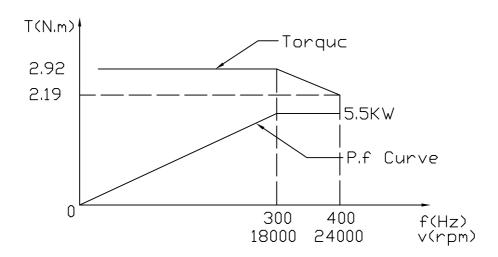

TA:20℃ Serv:S1 Water cooLing